



Model: 32228J2

Basic size of
 mm


d:	140
D:	250
T:	71.75

The basic rated load is
 kN

trends C:	644
static state Co:	1000
Fatigue load limit Pu:	100

Rated rotation speed is
 r/min

Refer to the speed:	1900
limit speed:	2600
quality:	14.5
model:	32228J 2
ISO335	
Size series (ABMA):	4FD

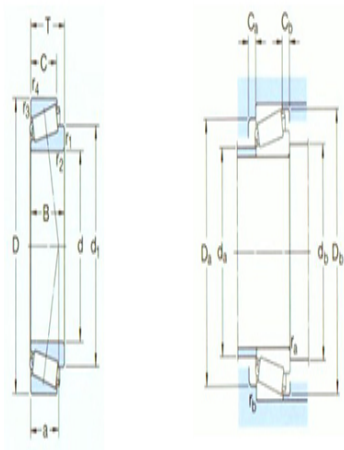

Dimensions are
 mm

d:	140
d ₁ ~ :	191
B:	68
C:	58
r _{1,2} the min:	4
r _{3,4} the min:	3
a:	60

Shoulder gear and chamfer size
 mm

d _a the max:	159
d _b the min:	156
Da the min:	210
Da the max:	236
Db the min:	238
Ca the min:	8

Cb the min:	13.5
r _a the max:	3
r _b the max:	2.5

Calculation coefficient

e:	0.43
Y:	1.4
Yo:	0.8