



## Model: T4DB150

Basic size of  
mm


d:	150
D:	210
T:	32

The basic rated load is  
kN

trends C:	233
static state Co:	390
Fatigue load limit Pu:	40

Rated rotation speed is  
r/min

Refer to the speed:	2000
limit speed:	3000
quality:	3.05
model:	T4DB150
ISO335	0
Size series (ABMA):	4DB

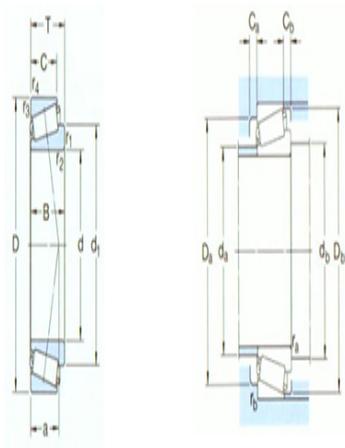

Dimensions are  
mm

d:	150
d <sub>1</sub> ~ :	177
B:	30
C:	23
r <sub>1,2</sub> the min:	3
r <sub>3,4</sub> the min:	3
a:	41

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	162
d <sub>b</sub> the min:	162
Da the min:	194
Da the max:	196
Db the min:	203
Ca the min:	5

Cb the min:	9
r <sub>a</sub> the max:	2.5
r <sub>b</sub> the max:	2.5

Calculation coefficient

e:	0.46
Y:	1.3
Yo:	0.7