



## Model: 32232J2

Basic size of  
mm


d:	160
D:	290
T:	84

The basic rated load is  
kN

trends C:	880
static state Co:	1400
Fatigue load limit Pu:	132

Rated rotation speed is  
r/min

Refer to the speed:	1600
limit speed:	2200
quality:	25.5
model:	32232J 2
ISO335 Size series (ABMA):	4GD

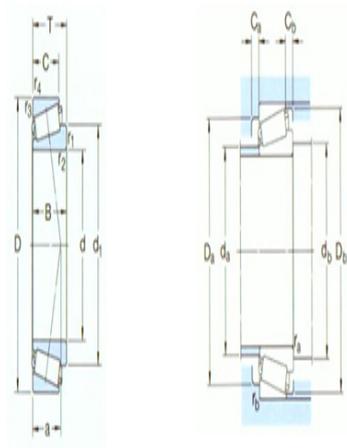

Dimensions are  
mm

d:	160
d <sub>1</sub> ~ :	221
B:	80
C:	67
r <sub>1,2</sub> the min:	4
r <sub>3,4</sub> the min:	3
a:	70

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	183
d <sub>b</sub> the min:	176
Da the min:	242
Da the max:	275
Db the min:	274
Ca the min:	10

Cb the min:	17
r <sub>a</sub> the max:	3
r <sub>b</sub> the max:	2.5

Calculation coefficient

e:	0.43
Y:	1.4
Yo:	0.8