



Model: 30236J2

Basic size of
mm


| | |
|----|-----|
| d: | 180 |
| D: | 320 |
| T: | 57 |

The basic rated load is
kN

| | |
|------------------------|-----|
| trends C: | 583 |
| static state Co: | 815 |
| Fatigue load limit Pu: | 80 |

Rated rotation speed is
r/min

| | |
|---------------------|-------------|
| Refer to the speed: | 1500 |
| limit speed: | 2000 |
| quality: | 20 |
| model: | 30236J 2 |
| ISO335 | |
| Size series (ABMA): | 4GB |

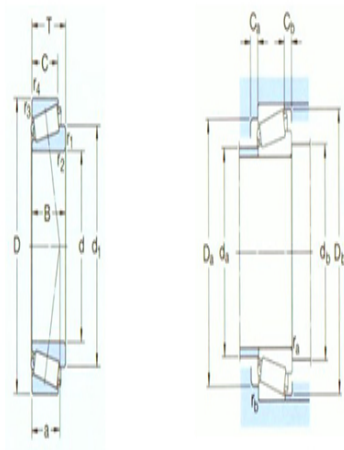

Dimensions are
mm

| | |
|---------------------------|-----|
| d: | 180 |
| d ₁ ~ : | 239 |
| B: | 52 |
| C: | 43 |
| r _{1,2} the min: | 5 |
| r _{3,4} the min: | 4 |
| a: | 61 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the max: | 211 |
| d _b the min: | 200 |
| Da the min: | 278 |
| Da the max: | 303 |
| Db the min: | 297 |
| Ca the min: | 9 |

| | |
|-------------------------|----|
| Cb the min: | 14 |
| r _a the max: | 4 |
| r _b the max: | 3 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.44 |
| Y: | 1.35 |
| Yo: | 0.8 |