



Model: 32038X

Basic size of
mm


d:	190
D:	290
T:	64

The basic rated load is
kN

trends C:	660
static state Co:	1200
Fatigue load limit Pu:	112

Rated rotation speed is
r/min

Refer to the speed:	1500
limit speed:	2000
quality:	15
model:	32038 X
ISO335	
Size series (ABMA):	4FD

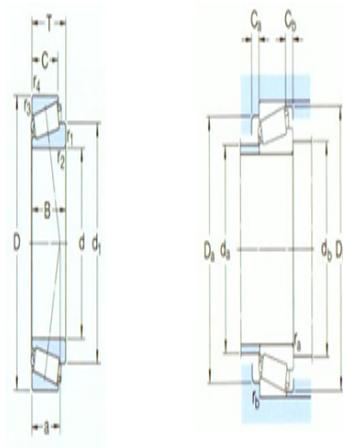

Dimensions are
mm

d:	190
d ₁ ~ :	240
B:	64
C:	48
r _{1,2} the min:	3
r _{3,4} the min:	2.5
a:	62

Shoulder gear and chamfer size
mm

d _a the max:	210
d _b the min:	204
Da the min:	257
Da the max:	276
Db the min:	279
Ca the min:	10

Cb the min:	16
r _a the max:	2.5
r _b the max:	2

Calculation coefficient

e:	0.44
Y:	1.35
Yo:	0.8