



**Model: 32244J2**

Basic size of  
 mm


d:	220
D:	400
T:	114

The basic rated load is  
 kN

trends C:	1610
static state Co:	2700
Fatigue load limit Pu:	232

Rated rotation speed is  
 r/min

Refer to the speed:	1100
limit speed:	1500
quality:	60
model:	32244J 2
ISO335	-
Size series (ABMA):	-

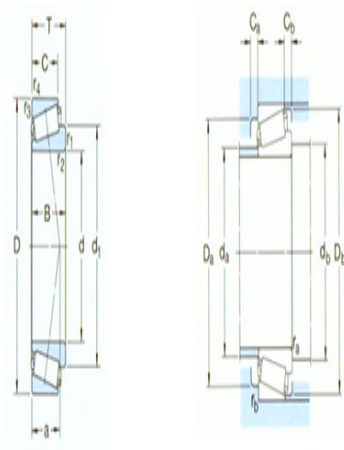

Dimensions are  
 mm

d:	220
d <sub>1</sub> ~ :	306
B:	108
C:	90
r <sub>1,2</sub> the min:	5
r <sub>3,4</sub> the min:	4
a:	95

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the max:	253
d <sub>b</sub> the min:	242
Da the min:	334
Da the max:	383
Db the min:	379
Ca the min:	13

Cb the min:	24
r <sub>a</sub> the max:	4
r <sub>b</sub> the max:	3

Calculation coefficient

e:	0.43
Y:	1.4
Yo:	0.8