

## Model: 14137A/14276/Q

Basic size of  
mm


d:	34.925
D:	69.012
T:	19.845

The basic rated load is  
kN

trends C:	53.9
static state Co:	67
Fatigue load limit Pu:	7.35

Rated rotation speed is  
r/min

Refer to the speed:	7500
limit speed:	11000
quality:	0.34
model:	14137A/14276/Q
series:	14000

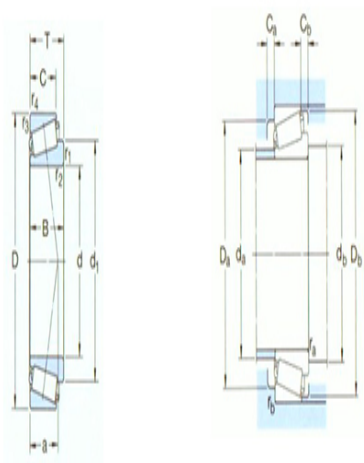

Dimensions are  
mm

d:	34.925
d <sub>1</sub> ~ :	50.7
B:	19.583
C:	15.875
r <sub>1,2</sub> the min:	1.5
r <sub>3,4</sub> the min:	1.3
a:	15

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	43
d <sub>b</sub> the min:	42
Da the min:	47
Da the max:	61.5
Db the min:	63
Ca the min:	3

Cb the min:	3.5
r <sub>a</sub> the max:	1.5
r <sub>b</sub> the max:	1.3

Calculation coefficient

e:	0.37
Y:	1.6
Yo:	0.9