



## Model: 25880/25820/Q

Basic size of  
mm


d:	36.487
D:	73.025
T:	23.812

The basic rated load is  
kN

trends C:	83
static state Co:	88
Fatigue load limit Pu:	9.8

Rated rotation speed is  
r/min

Refer to the speed:	8000
limit speed:	10000
quality:	0.45
model:	*25880/25820/Q
series:	25800

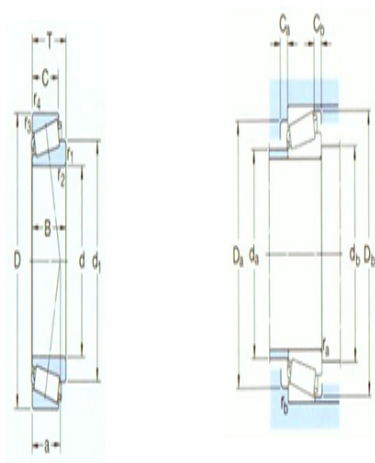

Dimensions are  
mm

d:	36.487
d <sub>1</sub> ~ :	52.5
B:	24.608
C:	19.05
r <sub>1,2</sub> the min:	1.5
r <sub>3,4</sub> the min:	2.3
a:	15

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	44
d <sub>b</sub> the min:	43.5
Da the min:	62
Da the max:	66.5
Db the min:	67
Ca the min:	5

Cb the min:	4.5
r <sub>a</sub> the max:	1.5
r <sub>b</sub> the max:	2

Calculation coefficient

e:	0.3
Y:	2
Yo:	1.1