

Model: 535/532A

Basic size of
mm


d:	44.45
D:	107.95
T:	38.1

The basic rated load is
kN

trends C:	151
static state Co:	190
Fatigue load limit Pu:	22.8

Rated rotation speed is
r/min

Refer to the speed:	4800
limit speed:	7000
quality:	1.85
model:	535/532A
series:	535

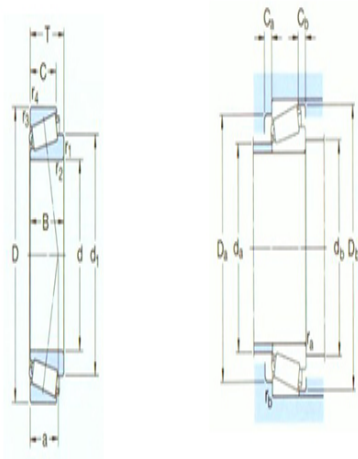

Dimensions are
mm

d:	44.45
d ₁ ~ :	76.5
B:	36.957
C:	28.575
r _{1,2} the min:	3.5
r _{3,4} the min:	3.3
a:	24

Shoulder gear and chamfer size
mm

d _a the max:	64
d _b the min:	55.5
Da the min:	90
Da the max:	95.5
Db the min:	97
Ca the min:	5
Cb the min:	7.5

r_a the max:	3
----------------	---

r_b the max:	3
----------------	---

Calculation coefficient

e:	0.3
----	-----

:	2
---	---

Yo:	1.1
-----	-----