

### Model: 535/532X

Basic size of  
mm


d:	44.45
D:	107.95
T:	38.1

The basic rated load is  
kN

trends C:	151
static state Co:	190
Fatigue load limit Pu:	22.8

Rated rotation speed is  
r/min

Refer to the speed:	4800
limit speed:	7000
quality:	1.7
model:	535/532X
series:	535

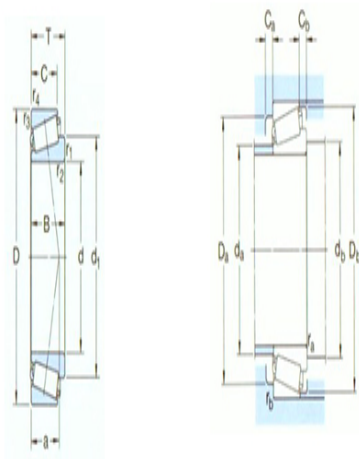

Dimensions are  
mm

d:	44.45
d <sub>1</sub> ~ :	76.5
B:	36.957
C:	30.162
r <sub>1,2</sub> the min:	3.5
r <sub>3,4</sub> the min:	3.3
a:	24

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	64
d <sub>b</sub> the min:	55.5
Da the min:	90
Da the max:	95.5
Db the min:	97
Ca the min:	5
Cb the min:	7.5

$r_a$ the max:	3
----------------	---

$r_b$ the max:	3
----------------	---

Calculation coefficient

e:	0.3
----	-----

:	2
---	---

Yo:	1.1
-----	-----