



Model: LM603049/011/Q

Basic size of
mm


d:	45.242
D:	77.788
T:	19.842

The basic rated load is
kN

trends C:	62
static state Co:	69.5
Fatigue load limit	7.65
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	7000
limit speed:	9000
quality:	0.37
model:	*LM603049/011/ Q
series:	LM603000

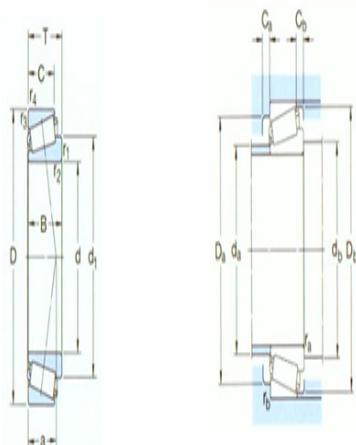

Dimensions are
mm

d:	45.242
d ₁ ~ :	60.9
B:	19.842
C:	15.08
r _{1,2} the min:	3.5
r _{3,4} the min:	0.8
a:	17

Shoulder gear and chamfer size
mm

d _a the max:	52
d _b the min:	57
Da the min:	68
Da the max:	72
Db the min:	74

Ca the min:	4
Cb the min:	4.5
r _a the max:	3
r _b the max:	0.8

Calculation coefficient

e:	0.43
:	1.4
Yo:	0.8