



### Model: 387/382A

Basic size of  
mm


d:	57.15
D:	96.838
T:	20.886

The basic rated load is  
kN

trends C:	80.9
static state Co:	102
Fatigue load limit Pu:	11.6

Rated rotation speed is  
r/min

Refer to the speed:	5000
limit speed:	7500
quality:	0.59
model:	387/382A
series:	385

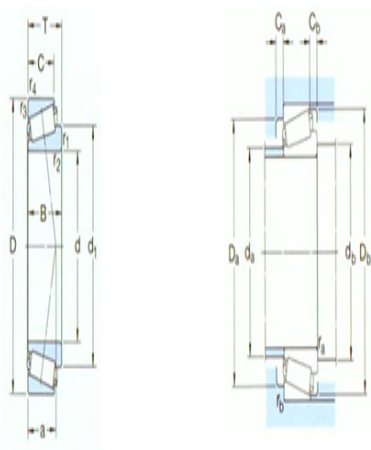

Dimensions are  
mm

d:	57.15
d <sub>1</sub> ~ :	74.1
B:	21.946
C:	15.875
r <sub>1,2</sub> the min:	2.3
r <sub>3,4</sub> the min:	0.8
a:	17

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	65
d <sub>b</sub> the min:	66.5
Da the min:	87
Da the max:	91.5
Db the min:	91
Ca the min:	5
Cb the min:	5

$r_a$ the max:	2
----------------	---

$r_b$ the max:	0.8
----------------	-----

Calculation coefficient

e:	0.35
----	------

Y:	1.7
----	-----

Yo:	0.9
-----	-----