



### Model: 39580/39528/Q

Basic size of  
mm



d:	57.15
D:	119.985
T:	32.75

The basic rated load is  
kN

trends C:	142
static state Co:	204
Fatigue load limit Pu:	23.6

Rated rotation speed is  
r/min

Refer to the speed:	4300
limit speed:	6300
quality:	1.75
model:	39580/39528/Q
series:	39500

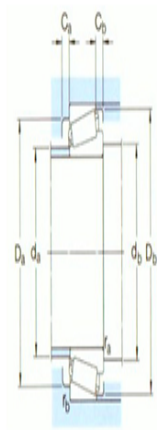

Dimensions are  
mm

d:	57.15
d <sub>1</sub> ~ :	88.3
B:	30.162
C:	26.949
r <sub>1,2</sub> the min:	3.5
r <sub>3,4</sub> the min:	0.8
a:	25

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	76
d <sub>b</sub> the min:	68.5
Da the min:	100
Da the max:	114
Db the min:	107
Ca the min:	5

Cb the min:	6
r <sub>a</sub> the max:	3
r <sub>b</sub> the max:	0.8

Calculation coefficient

e:	0.33
Y:	1.8
Yo:	1