



Model: M239448A/410

Basic size of
mm

d:	191.237
D:	279.4
T:	52.388

The basic rated load is
kN

trends C:	523
static state Co:	980
Fatigue load limit Pu:	95

Rated rotation speed is
r/min



Refer to the speed:	1600
limit speed:	2200
quality:	9.2
model:	M239448A/410
series:	M239400

Dimensions are
mm

d:	191.237
d ₁ ~ :	232
B:	58.738
C:	41.275
r _{1,2} the min:	3.3
r _{3,4} the min:	3.3
a:	49

Shoulder gear and chamfer size
mm

d _a the max:	211
d _b the min:	204
Da the min:	254
Da the max:	265
Db the min:	266
Ca the min:	9

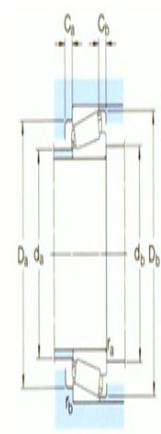

Cb the min:	11
r _a the max:	3
r _b the max:	3

Calculation coefficient

e:	0.35
Y:	1.7
Yo:	0.9