



## Model: M349547/510

Basic size of  
mm


d:	255.6
D:	342.9
T:	57.15

The basic rated load is  
kN

trends C:	594
static state Co:	1220
Fatigue load limit Pu:	110

Rated rotation speed is  
r/min

Refer to the speed:	1200
limit speed:	1800
quality:	14
model:	M349547/510
series:	M349500

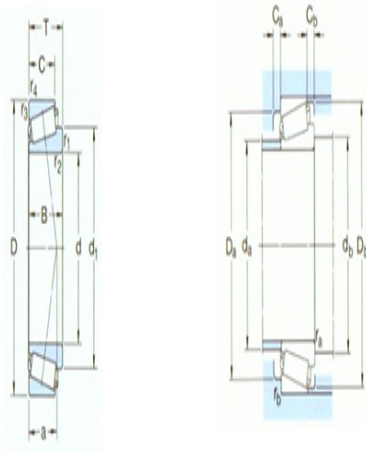

Dimensions are  
mm

d:	255.6
d <sub>1</sub> ~ :	297
B:	63.5
C:	44.45
r <sub>1,2</sub> the min:	1.5
r <sub>3,4</sub> the min:	3.3
a:	60

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	274
d <sub>b</sub> the min:	267
Da the min:	318
Da the max:	328
Db the min:	331
Ca the min:	9
Cb the min:	12.5

$r_a$ the max:	1.5
$r_b$ the max:	3

Calculation coefficient

e:	0.35
Y:	1.7
Yo:	0.9