

Model: HM262749/710

Basic size of
mm


d:	346.075
D:	488.95
T:	95.25

The basic rated load is
kN

trends C:	1420
static state Co:	3150
Fatigue load limit Pu:	255

Rated rotation speed is
r/min

Refer to the speed:	850
limit speed:	1200
quality:	55
model:	HM262749/710
series:	HM262700

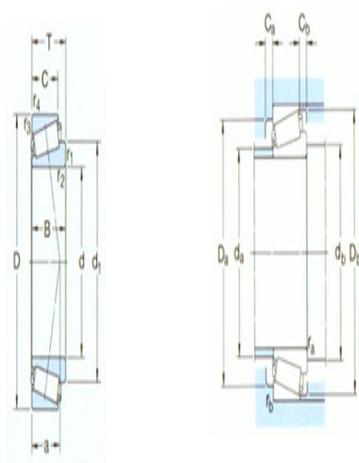

Dimensions are
mm

d:	346.075
d ₁ ~ :	413
B:	95.25
C:	74.612
r _{1,2} the min:	6.4
r _{3,4} the min:	3.3
a:	88

Shoulder gear and chamfer size
mm

d _a the max:	379
d _b the min:	378
Da the min:	442
Da the max:	472
Db the min:	467
Ca the min:	12

Cb the min:	21
r _a the max:	6
r _b the max:	3

Calculation coefficient

e:	0.33
Y:	1.8
Yo:	1