



Model: EE243196/250/HA

2

Basic size of
mm


d:	498.475
D:	634.873
T:	80.962

The basic rated load is
kN

trends C:	1470
static state Co:	3650
Fatigue load limit	270
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	600
limit speed:	850
quality:	59.5
model:	EE243196/250/HA 2
series:	243000

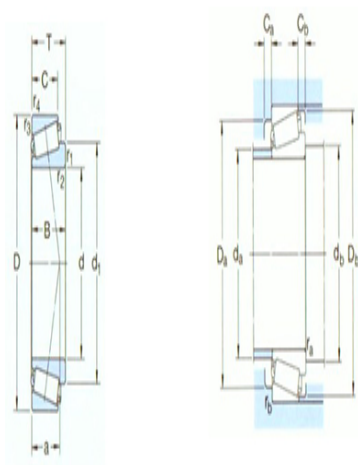

Dimensions are
mm

d:	498.475
d ₁ ~ :	556
B:	80.962
C:	63.5
r _{1,2} the min:	6.4
r _{3,4} the min:	3.3
a:	98

Shoulder gear and chamfer size
mm

d _a the max:	522
d _b the min:	530
Da the min:	590
Da the max:	618

Db the min: 610

Ca the min: 14

Cb the min: 17

r_a the max: 6

r_b the max: 3

Calculation coefficient

e: 0.35

Y: 1.7

Yo: 0.9