

Model: EE843220/290

Basic size of
mm

d:	558.8
D:	736.6
T:	88.108

The basic rated load is
kN

trends C:	1830
static state Co:	4150
Fatigue load limit Pu:	305

Rated rotation speed is
r/min


Refer to the speed:	500
limit speed:	750
quality:	92.5
model:	EE843220/290
	0
series:	843000

Dimensions are
mm

d:	558.8
d ₁ ~ :	637
B:	88.108
C:	63.5
r _{1,2} the min:	6.4
r _{3,4} the min:	6.4
a:	111

Shoulder gear and chamfer size
mm

d _a the max:	600
d _b the min:	590
Da the min:	689
Da the max:	704
Db the min:	707
Ca the min:	13
Cb the min:	24.5

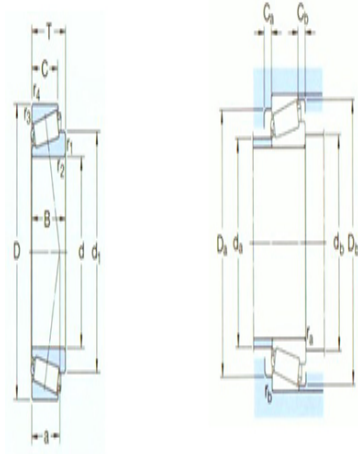

r_a the max:	6
----------------	---

r_b the max:	6
----------------	---

Calculation coefficient

e:	0.35
----	------

Y:	1.7
----	-----

Yo:	0.9
-----	-----