



Model: EE763330/410

Basic size of
mm


d:	838.2
D:	1041.4
T:	93.662

The basic rated load is
kN

trends C:	1900
static state Co:	4800
Fatigue load limit Pu:	320

Rated rotation speed is
r/min

Refer to the speed:	320
limit speed:	460
quality:	160
model:	EE763330/410
series:	763000

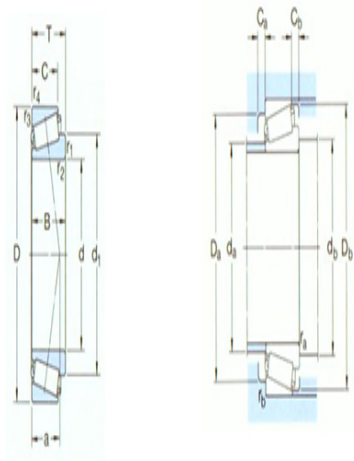

Dimensions are
mm

d:	838.2
d ₁ ~ :	925
B:	88.9
C:	66.675
r _{1,2} the min:	6.4
r _{3,4} the min:	6.4
a:	177

Shoulder gear and chamfer size
mm

d _a the max:	894
d _b the min:	870
Da the min:	975
Da the max:	1010
Db the min:	1001
Ca the min:	10
Cb the min:	26.5

r_a the max:	6
----------------	---

r_b the max:	6
----------------	---

Calculation coefficient

e:	0.44
----	------

Y:	1.35
----	------

Yo:	0.8
-----	-----