



### Model: 32026X/DF

Basic size of

mm

d:	130
D:	200
T:	90

The basic rated load is

kN

trends C:	539
static state Co:	1080
Fatigue load limit	110
Pu:	


Rated rotation speed is

r/min

Refer to the speed:	1800
limit speed:	3000
quality:	10
model:	32026X/D F

Dimensions are

mm

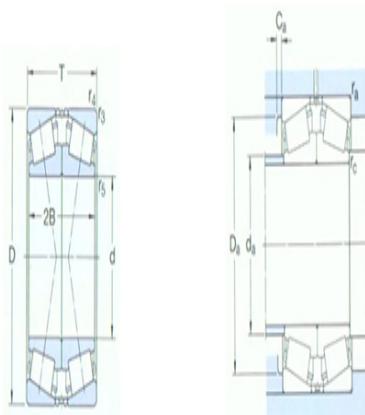

d:	130
2B:	90
r <sub>3,4</sub> the min:	2
r <sub>5</sub> the min:	0.6

Shoulder gear and chamfer size

mm

d <sub>a</sub> the max:	144
D <sub>a</sub> the min:	178
D <sub>a</sub> the max:	190
C <sub>a</sub> the min:	7
r <sub>a</sub> the max:	2
r <sub>c</sub> the max:	0.6

Calculation coefficient

e:	0.43
Y <sub>1</sub> :	1.6
Y <sub>2</sub> :	2.3
Y <sub>0</sub> :	1.6

