



### Model: 32228J2/DF

Basic size of  
mm


d:	140
D:	250
T:	143.5

The basic rated load is  
kN

trends C:	1100
static state Co:	2000
Fatigue load limit Pu:	200

Rated rotation speed is  
r/min

Refer to the speed:	1500
limit speed:	2600
quality:	29.5
model: F	32228J2/D

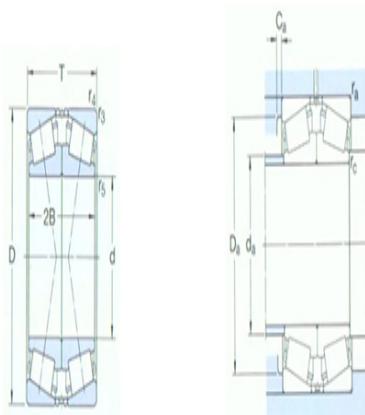

Dimensions are  
mm

d:	140
2B:	136
r <sub>3,4</sub> the min:	3
r <sub>5</sub> the min:	1

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	159
D <sub>a</sub> the min:	210
D <sub>a</sub> the max:	236
C <sub>a</sub> the min:	8
r <sub>a</sub> the max:	2.5
r <sub>c</sub> the max:	1

Calculation coefficient

e:	0.43
Y <sub>1</sub> :	1.6
Y <sub>2</sub> :	2.3
Y <sub>0</sub> :	1.6

