



**Model: 32938/DF**

Basic size of

mm

d:	190
D:	260
T:	90

The basic rated load is

kN

trends C:	616
static state Co:	1530
Fatigue load limit	143
Pu:	


Rated rotation speed is

r/min

Refer to the speed:	1300
limit speed:	2400
quality:	14.5
model:	32938/DF

Dimensions are

mm

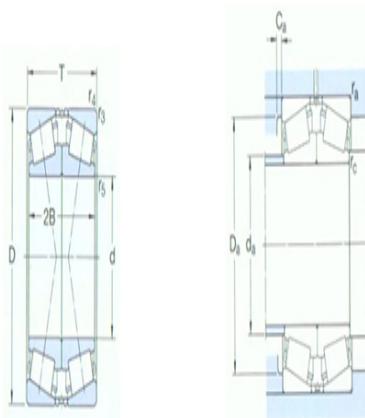

d:	190
2B:	90
r <sub>3,4</sub> the min:	2
r <sub>5</sub> the min:	0.6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	204
D <sub>a</sub> the min:	235
D <sub>a</sub> the max:	248
C <sub>a</sub> the min:	8
r <sub>a</sub> the max:	2
r <sub>c</sub> the max:	0.6

Calculation coefficient

e:	0.48
Y <sub>1</sub> :	1.4
Y <sub>2</sub> :	2.1
Y <sub>o</sub> :	1.4

