



Model: 32248T284J3/DB

Basic size of
mm

| | |
|----|-----|
| d: | 240 |
| D: | 440 |
| T: | 284 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 3300 |
| static state Co: | 6550 |
| Fatigue load limit Pu: | 550 |

Rated rotation speed is
r/min

| | |
|---------------------|--------------------|
| Refer to the speed: | 800 |
| limit speed: | 1400 |
| quality: | 180 |
| model: | 32248T284J3/D B |

Dimensions are
mm


| | |
|---------------------------|-----|
| d: | 240 |
| d ₁ ~ : | 346 |
| C: | 230 |
| r _{1,2} the min: | 5 |
| r ₅ the min: | 1.5 |
| a: | 240 |
| Cb the min: | 262 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _b the max: | 415 |
| Dbthe min: | 27 |
| r _a the max: | 4 |
| r _c the max: | 1.5 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.43 |
| Y1: | 1.6 |

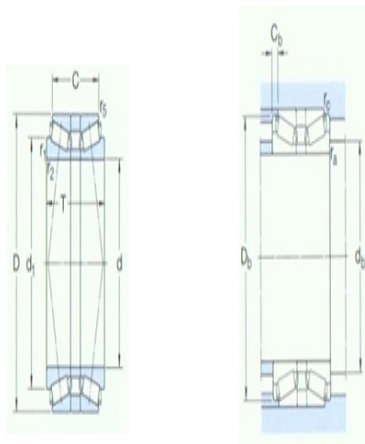

| | |
|-----|-----|
| Y2: | 2.3 |
| Yo: | 1.6 |