



### Model: 24013CC/W33

Basic size of  
 mm

d:	65
D:	100
B:	35

The basic rated load is  
 kN

trends C:	132
static state Co:	173
Fatigue load limit	20.4
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	4300
limit speed:	6300
quality:	0.95

model

Column hole:	*24013CC/W33
conical bore:	*24013CCK30/W33

Dimensions are  
 mm



d:	65
d <sub>2</sub> ~ :	73.8
D1 ~ :	87.3
b:	3.7
k:	2
r <sub>1,2</sub> the min:	1.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	71
Da the max:	94
r <sub>a</sub> the max:	1

Calculation coefficient

e:	0.27
----	------

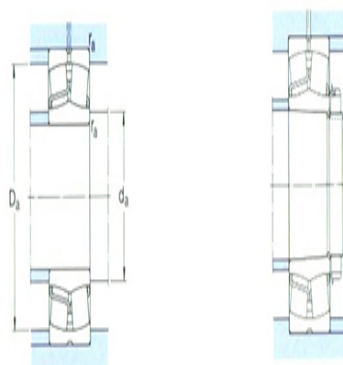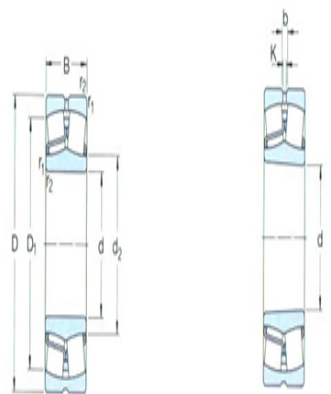

Y1:	2.5
Y2:	3.7
Y0:	2.5