



Model: 24013CCK30/W33

Basic size of
 mm

d:	65
D:	100
B:	35

The basic rated load is
 kN

trends C:	132
static state Co:	173
Fatigue load limit	20.4
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	4300
limit speed:	6300
quality:	0.95

model

Column hole:	*24013CC/W33
conical bore:	*24013CCK30/W33
	3

Dimensions are
 mm



d:	65
d ₂ ~ :	73.8
D1 ~ :	87.3
b:	3.7
k:	2
r _{1,2} the min:	1.1

Shoulder gear and chamfer size
 mm

d _a the min:	71
Da the max:	94
r _a the max:	1

Calculation coefficient

e:	0.27
----	------

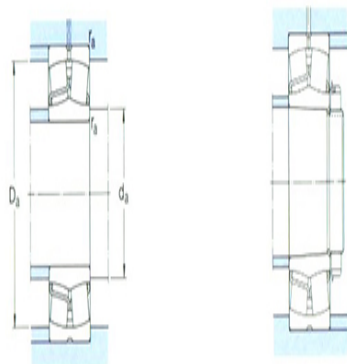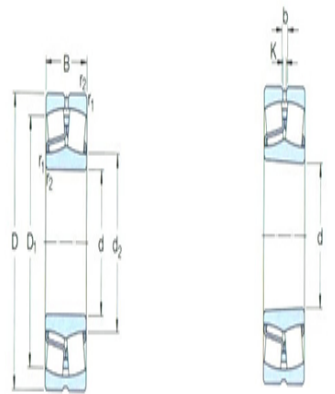

Y1:	2.5
Y2:	3.7
Y0:	2.5