



### Model: 24022CC/W33

Basic size of  
mm

|    |     |
|----|-----|
| d: | 110 |
| D: | 170 |
| B: | 60  |

The basic rated load is  
kN

|                       |     |
|-----------------------|-----|
| trends C:             | 415 |
| static state Co:      | 620 |
| Fatigue load<br>limit | 67  |
| Pu:                   |     |

Rated rotation speed is  
r/min

|                        |      |
|------------------------|------|
| Refer to the<br>speed: | 2400 |
| limit speed:           | 3600 |
| quality:               | 5    |

model

|               |                 |
|---------------|-----------------|
| Column hole:  | *24022CC/W33    |
| conical bore: | *24022CCK30/W33 |

Dimensions are  
mm



|                           |     |
|---------------------------|-----|
| d:                        | 110 |
| d <sub>2</sub> ~ :        | 122 |
| D1 ~ :                    | 149 |
| b:                        | 5.5 |
| k:                        | 3   |
| r <sub>1,2</sub> the min: | 2   |

Shoulder gear and chamfer size  
mm

|                         |     |
|-------------------------|-----|
| d <sub>a</sub> the min: | 119 |
| Da the max:             | 161 |
| r <sub>a</sub> the max: | 2   |

Calculation coefficient

|    |      |
|----|------|
| e: | 0.33 |
|----|------|

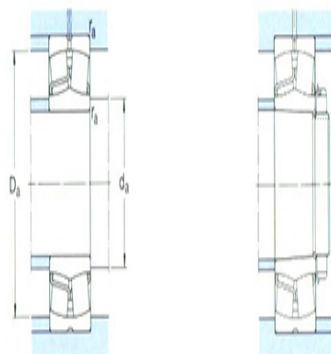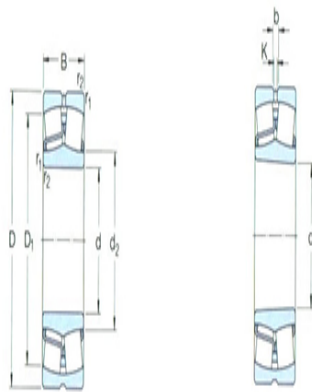

|     |   |
|-----|---|
| Y1: | 2 |
| Y2: | 3 |
| Y0: | 2 |