



Model: 24122CC/W33

Basic size of
mm

d:	110
D:	180
B:	69

The basic rated load is
kN

trends C:	520
static state Co:	750
Fatigue load limit	78
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	2200
limit speed:	3000
quality:	7.1

model

Column hole:	*24122CC/W33
conical bore:	*24122CCK30/W33

Dimensions are
mm



d:	110
d ₂ ~ :	123
D1 ~ :	153
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
mm

d _a the min:	121
Da the max:	169
r _a the max:	2

Calculation coefficient

e:	0.37
----	------

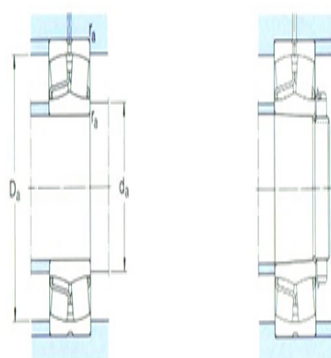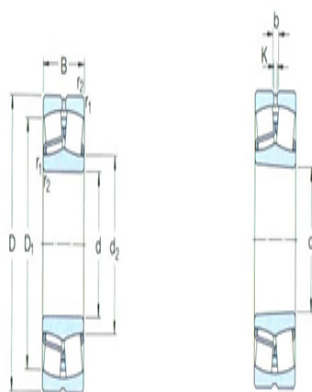

Y1:	1.8
Y2:	2.7
Y0:	1.8