



Model: 24015CCK30/W33

Basic size of
mm

d:	75
D:	115
B:	40

The basic rated load is
kN

trends C:	173
static state Co:	232
Fatigue load limit	28.5
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	3800
limit speed:	5300
quality:	1.55

model

Column hole:	*24015CC/W33
conical bore:	*24015CCK30/W33
	3

Dimensions are
mm



d:	75
d ₂ ~ :	84.1
D1 ~ :	100
b:	5.5
k:	3
r _{1,2} the min:	1.1

Shoulder gear and chamfer size
mm

d _a the min:	81
Da the max:	109
r _a the max:	1

Calculation coefficient

e:	0.28
----	------

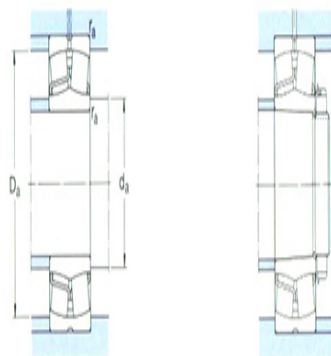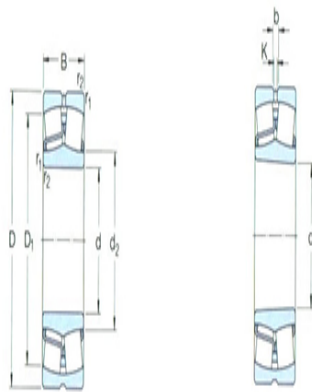

Y1:	2.4
Y2:	3.6
Y0:	2.5