



**Model: 24020CCK30/W33**

Basic size of  
 mm

d:	100
D:	150
B:	50

The basic rated load is  
 kN

trends C:	285
static state Co:	415
Fatigue load limit	45.5
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	2800
limit speed:	4000
quality:	3.15

model

Column hole:	*24020CC/W33
conical bore:	*24020CCK30/W33
	3

Dimensions are  
 mm



d:	100
d <sub>2</sub> ~ :	111
D1 ~ :	132
b:	5.5
k:	3
r <sub>1,2</sub> the min:	1.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	107
Da the max:	143
r <sub>a</sub> the max:	1.5

Calculation coefficient

e:	0.28
----	------

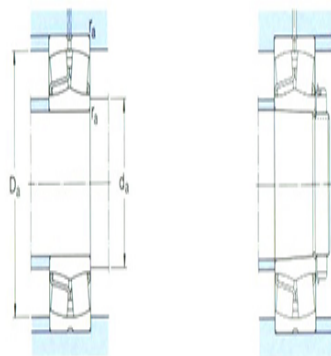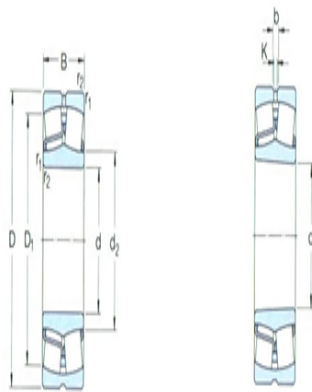

Y1:	2.4
Y2:	3.6
Y0:	2.5