



Model: 23120CCK/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 100 |
| D: | 165 |
| B: | 52 |

The basic rated load is
 kN



| | |
|------------------------|-----|
| trends C: | 365 |
| static state Co: | 490 |
| Fatigue load limit Pu: | 53 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 3000 |
| limit speed: | 4000 |
| quality: | 4.55 |

model

| | |
|---------------|---------------|
| Column hole: | *23120CC/W33 |
| conical bore: | *23120CCK/W33 |

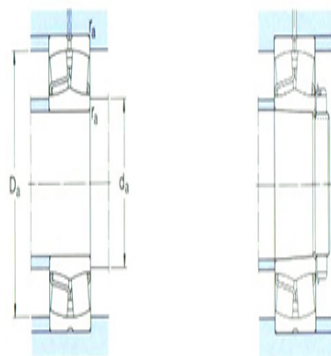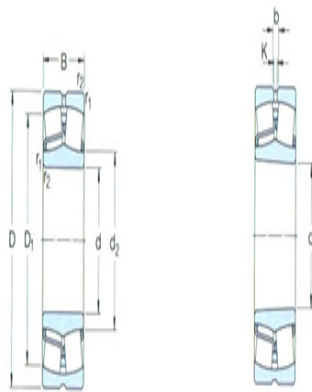

Dimensions are
 mm

| | |
|---------------------------|-----|
| d: | 100 |
| d ₂ ~ : | 115 |
| D1 ~ : | 144 |
| b: | 5.5 |
| k: | 3 |
| r _{1,2} the min: | 2 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 111 |
| Da the max: | 154 |
| r _a the max: | 2 |

Calculation coefficient

| | |
|-----|-----|
| e: | 0.3 |
| Y1: | 2.3 |

| | |
|-----|-----|
| Y2: | 3.4 |
| Y0: | 2.2 |