



Model: 24120CCK30/W33

Basic size of
 mm

d:	100
D:	165
B:	65

The basic rated load is
 kN

trends C:	455
static state Co:	640
Fatigue load limit	68
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	2400
limit speed:	3200
quality:	5.65

model

Column hole:	*24120CC/W33
conical bore:	*24120CCK30/W33
	3

Dimensions are
 mm



d:	100
d ₂ ~ :	113
D1 ~ :	141
b:	3.7
k:	2
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	111
Da the max:	154
r _a the max:	2

Calculation coefficient

e:	0.37
----	------

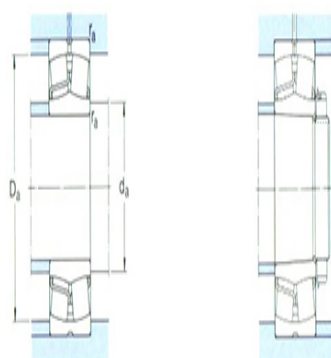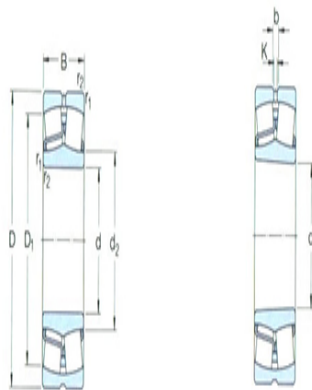

Y1:	1.8
Y2:	2.7
Y0:	1.8