



Model: 23022CCK/W33

Basic size of
 mm

d:	110
D:	170
B:	45

The basic rated load is
 kN



trends C:	310
static state Co:	440
Fatigue load limit Pu:	46.5

Rated rotation speed is
 r/min

Refer to the speed:	3400
limit speed:	4300
quality:	3.8

model

Column hole:	*23022CC/W33
conical bore:	*23022CCK/W33

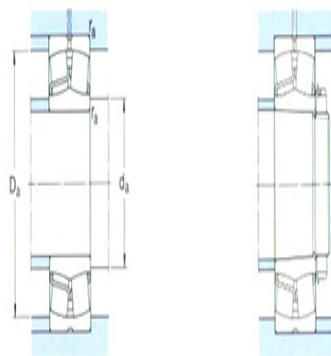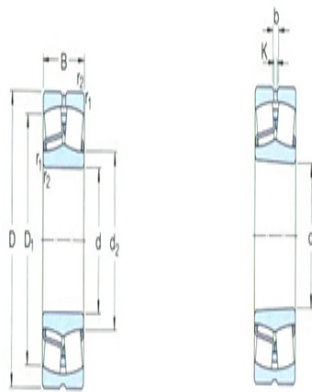

Dimensions are
 mm

d:	110
d ₂ ~ :	125
D1 ~ :	151
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	119
Da the max:	161
r _a the max:	2

Calculation coefficient

e:	0.23
Y1:	2.9

Y2:	4.4
Y0:	2.8