



Model: 24022CCK30/W33

Basic size of
 mm

d:	110
D:	170
B:	60

The basic rated load is
 kN

trends C:	415
static state Co:	620
Fatigue load limit	67
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	2400
limit speed:	3600
quality:	5

model

Column hole:	*24022CC/W33
conical bore:	*24022CCK30/W33
	3

Dimensions are
 mm



d:	110
d ₂ ~ :	122
D1 ~ :	149
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	119
Da the max:	161
r _a the max:	2

Calculation coefficient

e:	0.33
----	------

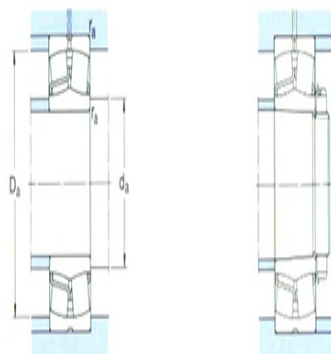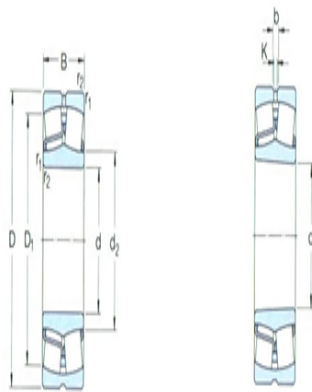

Y1:	2
Y2:	3
Y0:	2