



**Model: 24122CCK30/W33**

Basic size of  
 mm

d:	110
D:	180
B:	69

The basic rated load is  
 kN

trends C:	520
static state Co:	750
Fatigue load limit	78
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	2200
limit speed:	3000
quality:	7.1

model

Column hole:	*24122CC/W33
conical bore:	*24122CCK30/W33
	3

Dimensions are  
 mm



d:	110
d <sub>2</sub> ~ :	123
D1 ~ :	153
b:	5.5
k:	3
r <sub>1,2</sub> the min:	2

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	121
Da the max:	169
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.37
----	------

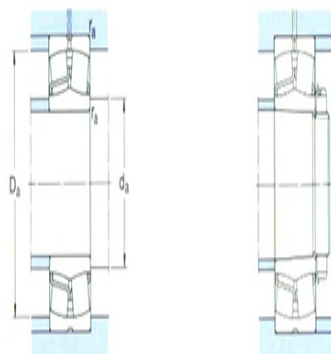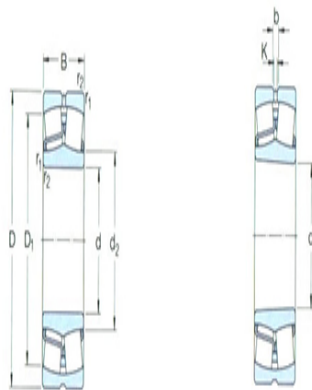

Y1:	1.8
Y2:	2.7
Y0:	1.8