



**Model: 23222CCK/W33**

Basic size of  
 mm

d:	110
D:	200
B:	69.8

The basic rated load is  
 kN

trends C:	600
static state Co:	765
Fatigue load limit Pu:	76.5

Rated rotation speed is  
 r/min

Refer to the speed:	2200
limit speed:	3200
quality:	9.85

model

Column hole:	*23222CC/W33
conical bore:	*23222CCK/W33

Dimensions are  
 mm



d:	110
d <sub>2</sub> ~ :	130
D1 ~ :	169
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	122
Da the max:	188
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.33
Y1:	2

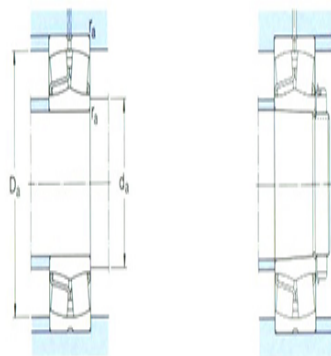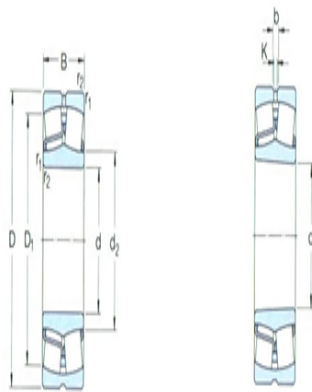

Y2:	3
Y0:	2