



Model: 23124CC/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 120 |
| D: | 200 |
| B: | 62 |

The basic rated load is
 kN


| | |
|------------------------|-----|
| trends C: | 510 |
| static state Co: | 695 |
| Fatigue load limit Pu: | 71 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 2600 |
| limit speed: | 3400 |
| quality: | 8 |


model

| | |
|---------------|---------------|
| Column hole: | *23124CC/W33 |
| conical bore: | *23124CCK/W33 |

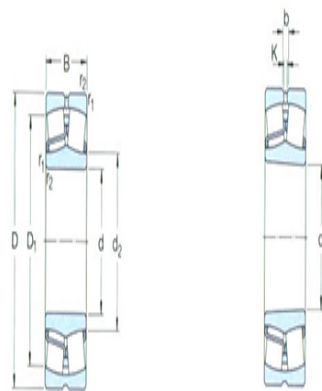

Dimensions are
 mm

| | |
|---------------------------|-----|
| d: | 120 |
| d ₂ ~ : | 139 |
| D1 ~ : | 174 |
| b: | 8.3 |
| k: | 4.5 |
| r _{1,2} the min: | 2 |

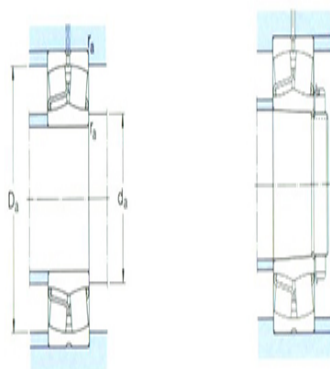

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 131 |
| Da the max: | 189 |
| r _a the max: | 2 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.28 |
| Y1: | 2.4 |

| | |
|-----|-----|
| Y2: | 3.6 |
| Y0: | 2.5 |