



**Model: 23224CC/W33**

Basic size of  
 mm

d:	120
D:	215
B:	76

The basic rated load is  
 kN



trends C:	695
static state Co:	930
Fatigue load limit Pu:	93

Rated rotation speed is  
 r/min

Refer to the speed:	2000
limit speed:	2800
quality:	12

model

Column hole:	*23224CC/W33
conical bore:	*23224CCK/W33

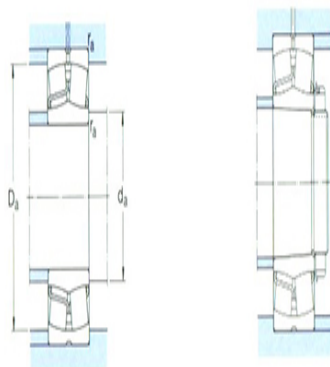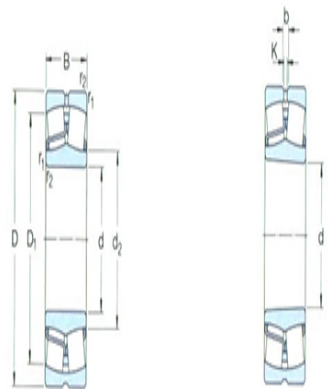

Dimensions are  
 mm

d:	120
d <sub>2</sub> ~ :	141
D1 ~ :	182
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	132
Da the max:	203
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8