



**Model: 24026CC/W33**

Basic size of  
 mm

d:	130
D:	200
B:	69

The basic rated load is  
 kN

trends C:	540
static state Co:	815
Fatigue load limit	81.5
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	2000
limit speed:	3000
quality:	8.05

model

Column hole:	*24026CC/W33
conical bore:	*24026CCK30/W33
	3

Dimensions are  
 mm



d:	130
d <sub>2</sub> ~ :	145
D1 ~ :	175
b:	5.5
k:	3
r <sub>1,2</sub> the min:	2

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	139
Da the max:	191
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.31
----	------

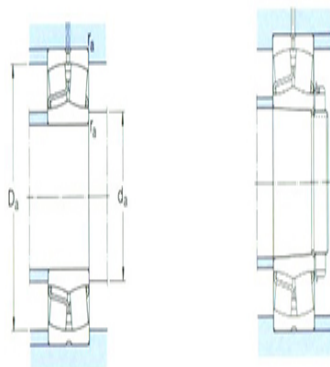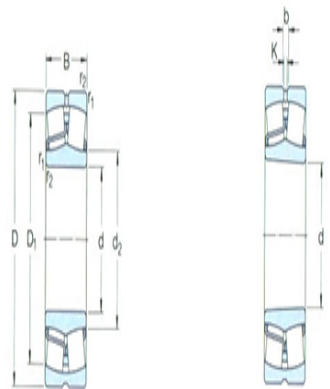

Y1:	2.2
Y2:	3.3
Y0:	2.2