



**Model: 23226CC/W33**

Basic size of  
mm

d:	130
D:	230
B:	80

The basic rated load is  
kN


trends C:	780
static state Co:	1060
Fatigue load limit Pu:	104

Rated rotation speed is  
r/min

Refer to the speed:	1900
limit speed:	2600
quality:	14.5


model

Column hole:	*23226CC/W33
conical bore:	*23226CCK/W33

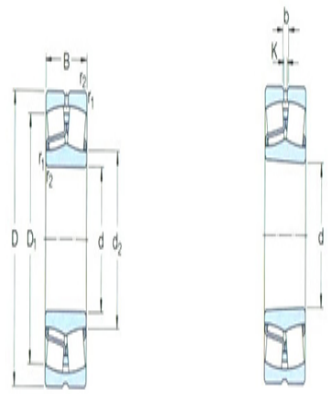

Dimensions are  
mm

d:	130
d <sub>2</sub> ~ :	151
D1 ~ :	196
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	3

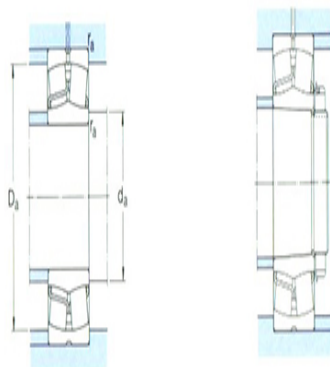

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	144
Da the max:	216
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.33
Y1:	2

Y2:	3
Y0:	2