



**Model: 23228CC/W33**

Basic size of  
mm

d:	140
D:	250
B:	88

The basic rated load is  
kN



trends C:	915
static state Co:	1250
Fatigue load limit Pu:	120

Rated rotation speed is  
r/min

Refer to the speed:	1700
limit speed:	2400
quality:	19

model

Column hole:	*23228CC/W33
conical bore:	*23228CCK/W33

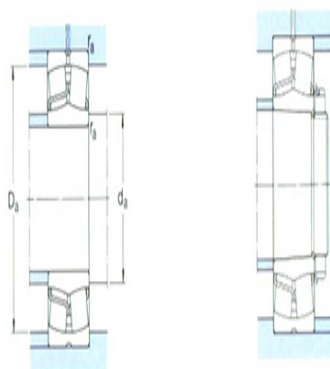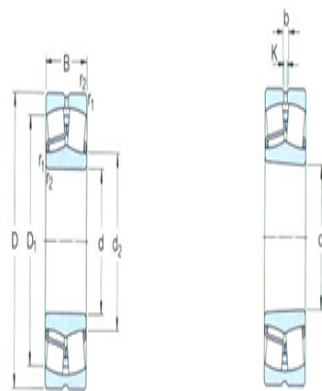

Dimensions are  
mm

d:	140
d <sub>2</sub> ~ :	165
D1 ~ :	212
b:	11.1
k:	6
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	154
Da the max:	236
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.33
Y1:	2

Y2:	3
Y0:	2