



**Model: 24130CC/W33**

Basic size of  
 mm

d:	150
D:	250
B:	100

The basic rated load is  
 kN

trends C:	1020
static state Co:	1530
Fatigue load limit	146
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1500
limit speed:	2200
quality:	20

model

Column hole:	*24130CC/W33
conical bore:	*24130CCK30/W3 3

Dimensions are  
 mm



d:	150
d <sub>2</sub> ~ :	169
D1 ~ :	211
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	162
Da the max:	238
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.37
----	------

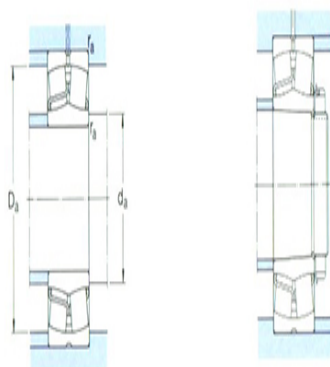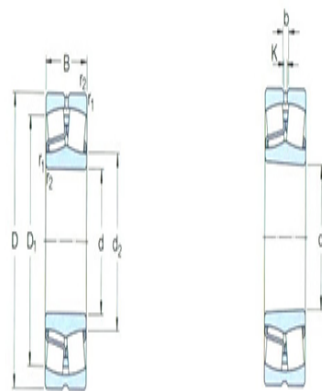

Y1:	1.8
Y2:	2.7
Y0:	1.8