



Model: 24024CCK30/W33

Basic size of
 mm

d:	120
D:	180
B:	60

The basic rated load is
 kN

trends C:	430
static state Co:	670
Fatigue load limit	68
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	2400
limit speed:	3400
quality:	5.45

model

Column hole:	*24024CC/W33
conical bore:	*24024CCK30/W33
	3

Dimensions are
 mm



d:	120
d ₂ ~ :	132
D1 ~ :	159
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	129
Da the max:	171
r _a the max:	2

Calculation coefficient

e:	0.3
----	-----

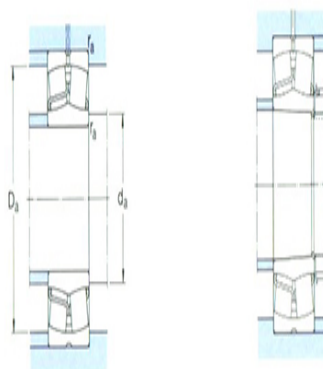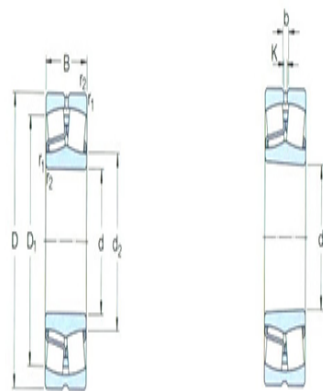

Y1:	2.3
Y2:	3.4
Y0:	2.2