



Model: 24124CCK30/W33

Basic size of
 mm

d:	120
D:	200
B:	80

The basic rated load is
 kN

trends C:	655
static state Co:	950
Fatigue load limit	95
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	1900
limit speed:	2600
quality:	10.3

model

Column hole:	*24124CC/W33
conical bore:	*24124CCK30/W33
	3

Dimensions are
 mm



d:	120
d ₂ ~ :	135
D1 ~ :	168
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	131
Da the max:	189
r _a the max:	2

Calculation coefficient

e:	0.37
----	------

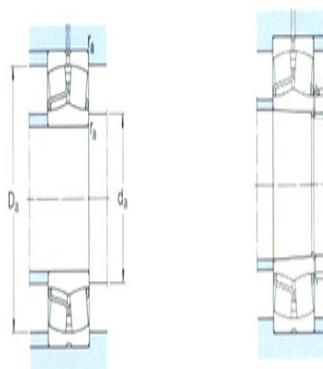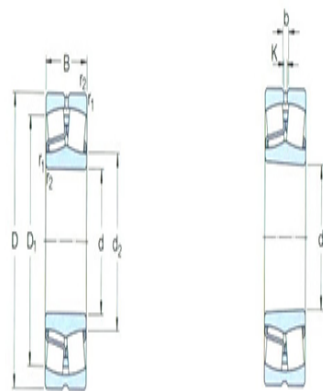

Y1:	1.8
Y2:	2.7
Y0:	1.8