



Model: 24126CCK30/W33

Basic size of
 mm

d:	130
D:	210
B:	80

The basic rated load is
 kN

trends C:	680
static state Co:	1000
Fatigue load limit	100
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	1800
limit speed:	2400
quality:	11

model

Column hole:	*24126CC/W33
conical bore:	*24126CCK30/W33
	3

Dimensions are
 mm



d:	130
d ₂ ~ :	146
D1 ~ :	180
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	141
Da the max:	199
r _a the max:	2

Calculation coefficient

e:	0.35
----	------

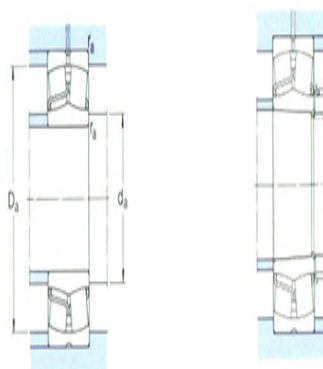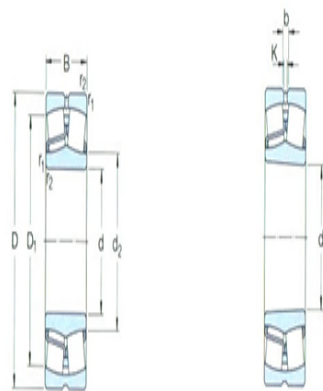

Y1:	1.9
Y2:	2.9
Y0:	1.8