



Model: 23028CCK/W33

Basic size of
mm

d:	140
D:	210
B:	53

The basic rated load is
kN


trends C:	465
static state Co:	680
Fatigue load limit Pu:	68

Rated rotation speed is
r/min

Refer to the speed:	2600
limit speed:	3400
quality:	6.55

model

Column hole:	*23028CC/W33
conical bore:	*23028CCK/W33

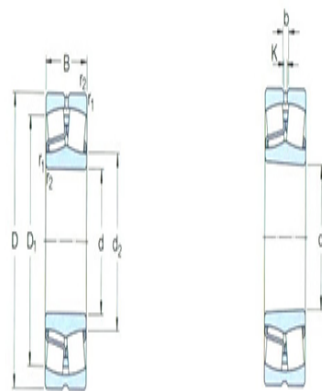

Dimensions are
mm


d:	140
d ₂ ~ :	158
D1 ~ :	190
b:	8.3
k:	4.5
r _{1,2} the min:	2

Shoulder gear and chamfer size
mm

d _a the min:	149
Da the max:	201
r _a the max:	2

Calculation coefficient

e:	0.22
Y1:	3

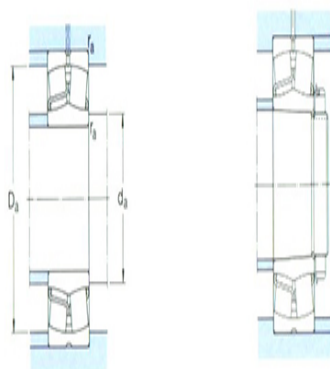

Y2:	4.6
Y0:	2.8