



**Model: 24028CCK30/W33**

Basic size of  
mm

d:	140
D:	210
B:	69

The basic rated load is  
kN

trends C:	570
static state Co:	900
Fatigue load limit	88
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	2000
limit speed:	2800
quality:	8.55

model

Column hole:	*24028CC/W33
conical bore:	*24028CCK30/W33
	3

Dimensions are  
mm



d:	140
d <sub>2</sub> ~ :	155
D1 ~ :	185
b:	5.5
k:	3
r <sub>1,2</sub> the min:	2

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	149
Da the max:	201
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.3
----	-----

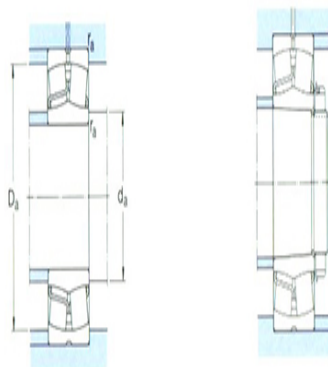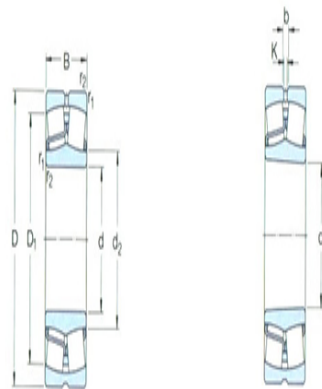

Y1:	2.3
Y2:	3.4
Y0:	2.2