



**Model: 23128CCK/W33**

Basic size of  
mm

d:	140
D:	225
B:	68

The basic rated load is  
kN


trends C:	630
static state Co:	900
Fatigue load limit Pu:	88

Rated rotation speed is  
r/min

Refer to the speed:	2200
limit speed:	2800
quality:	10.5


model

Column hole:	*23128CC/W33
conical bore:	*23128CCK/W33

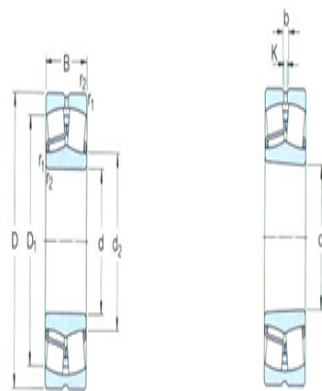

Dimensions are  
mm

d:	140
d <sub>2</sub> ~ :	159
D1 ~ :	197
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

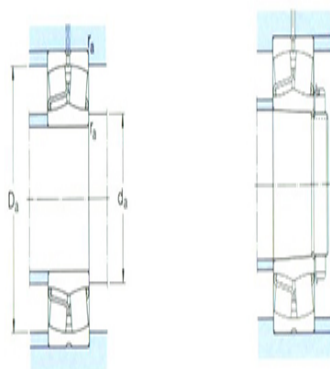

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	152
Da the max:	213
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.28
Y1:	2.4

Y2:	3.6
Y0:	2.5