



**Model: 24128CCK30/W33**

Basic size of  
 mm

d:	140
D:	225
B:	85

The basic rated load is  
 kN

trends C:	765
static state Co:	1160
Fatigue load limit	112
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1700
limit speed:	2400
quality:	13.5

model

Column hole:	*24128CC/W33
conical bore:	*24128CCK30/W33
	3

Dimensions are  
 mm



d:	140
d <sub>2</sub> ~ :	156
D1 ~ :	193
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	152
Da the max:	213
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.35
----	------

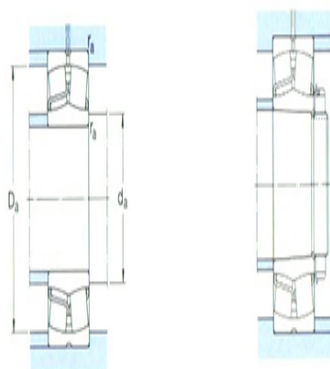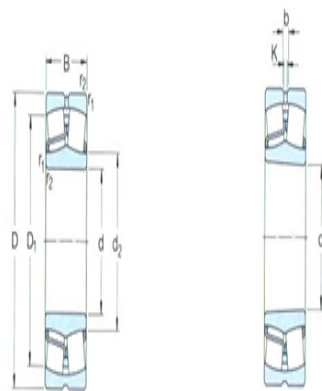

Y1:	1.9
Y2:	2.9
Y0:	1.8