



Model: 22228CCK/W33

Basic size of
mm

d:	140
D:	250
B:	68

The basic rated load is
kN


trends C:	710
static state Co:	900
Fatigue load limit Pu:	86.5

Rated rotation speed is
r/min

Refer to the speed:	2400
limit speed:	3200
quality:	14


model

Column hole:	*22228CC/W33
conical bore:	*22228CCK/W33

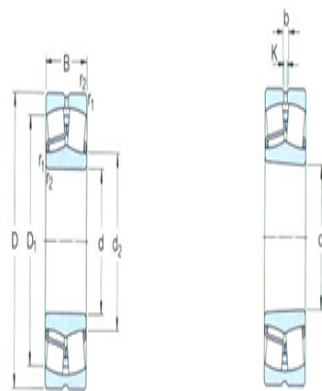

Dimensions are
mm

d:	140
d ₂ ~ :	166
D1 ~ :	216
b:	11.1
k:	6
r _{1,2} the min:	3

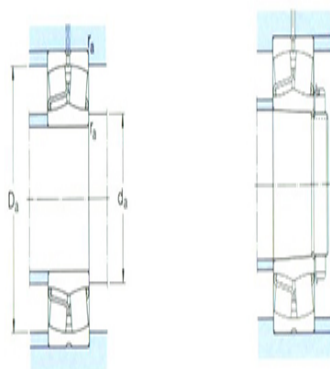

Shoulder gear and chamfer size
mm

d _a the min:	154
Da the max:	236
r _a the max:	2.5

Calculation coefficient

e:	0.26
Y1:	2.6

Y2:	3.9
Y0:	2.5