



**Model: 23030CCK/W33**

Basic size of  
mm

d:	150
D:	225
B:	56

The basic rated load is  
kN

trends C:	510
static state Co:	750
Fatigue load limit Pu:	73.5

Rated rotation speed is  
r/min

Refer to the speed:	2400
limit speed:	3200
quality:	7.95

model

Column hole:	*23030CC/W33
conical bore:	*23030CCK/W33

Dimensions are  
mm



d:	150
d <sub>2</sub> ~ :	169
D1 ~ :	203
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	161
Da the max:	214
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.22
Y1:	3

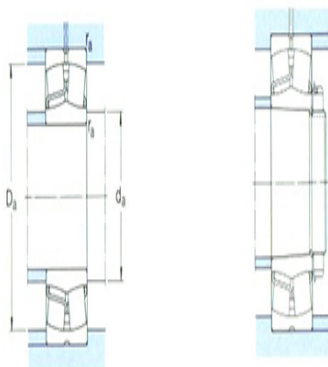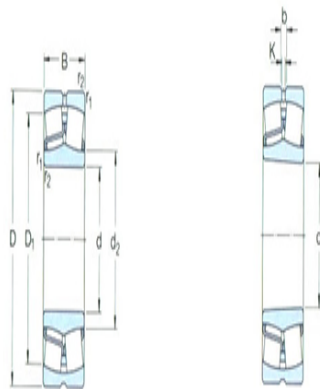

Y2:	4.6
Y0:	2.8